



PINSA
SELF ADHESIVE PINS
FIXING & SEALING

The **PINSA SELF-ADHESIVE PINS** are suitable for fastening insulation blankets to square or rectangular air ducts.




CONSTRUCTION
The **PINSA** has been manufactured out of galvanized steel. The **PINSA** consists of a pin and a foot. The foot has been provided with a synthetic rubber tack coat.
Clips are automatically delivered with the pins. The clip is going to be fastened to the **PINSA** after attaching the installation blanket. In consequence of this the blanket will stay in the correct position. Extra clips (**PINSACLIP**) are available as well.

Each square meter of insulation blanket needs 10 to 12 pins.



SAFETY
Protective caps (**PINSACAP**) for attaching round the pin are available to the pins.
(the protective caps must be ordered separately).
The use of **PINSACAP** is always recommended where people can be injured by projecting pins.

FASTENING
The best result will be achieved on a dry, fat-free and dust-free surface.

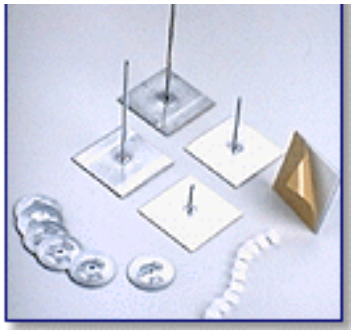

SPECIFICATIONS

Article code Pins:	**PINSA{Length}** Sold per 500Pcs
Available Lengths:	025, 032, 042, 051, 063, 076, 105, 165 & 210 mm
The foot has the following size:	50x50 mm
Operating temperature:	-40 °C to 80 °C 100°C for short period of time The processing, however, has to take place above +10°C.
Article code Clips:	**PINSACLIP** Sold per 1000Pcs
Article code Cap:	**PINSACAP** Sold per 1000Pcs

LIABILITY:
The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:
The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:
DEC International and the DEC logo are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.