



Serijska CBT-N, CBB-N i CST/CSB

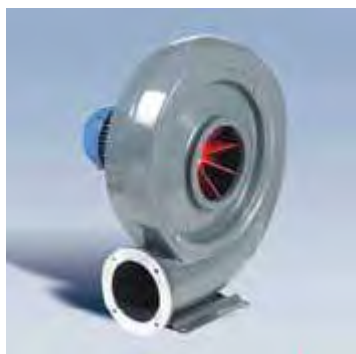

Konfiguracija modela CBT-40,60N,80N, 100N i 130N.

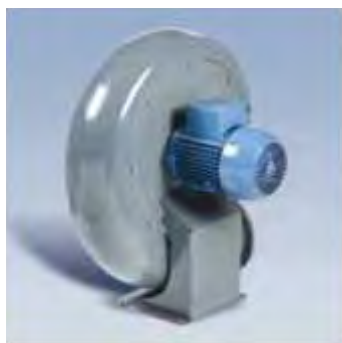

Konfiguracija modela CBT-125,160 i 170.



Centrifugalni ventilatori sa jednim usisom, za kontinualnu distribuciju vazduha do 120°C⁽¹⁾, napravljeni od livenog aluminijuma, zaštićeni od korozije epoksi nanosom, mogućnost okretanja kućišta, a samim tim i potisa, ventilaciono kolo dinamički balansirano sa radijalnim lopaticama, motor IP55⁽²⁾, klasa F, sa termičkom zaštitom i kugličnim ležajima sa niskim stepenom trenje.

⁽¹⁾ Modeli CBT-125,160 i 170: do 80°C

Modeli CSB: do 70°C

⁽²⁾ Modeli CSB: IP44.

Motori:

Dvopolni

Napajanje:

Monofazno 230V-50Hz

Trofazno 230/400V-50Hz

Dodatne informacije:

Motor može biti levokretni ili desnokretni. Kućište, samim tim i izduvni otvor, se može zakretati u 14 različitih položaja. Standardna orijentacija: LG 270. .

Na zahtev, dostupne su verzije koje imaju protivpožarnu zaštitu po ATEX direktivi za trofazne modele:

- Povećana sigurnost II2G EExIIIT3 (osim modela CBT-100 i 130)

- Vatrostalni (osim modela CBT-40 i 60)

II2G EExdIIBT5 ili EExdIICT4 ili II3D Ex tD 125°C ili 135°C.

ATEST

PRIMENA



Sušare



Industrija gvožđa i čelika



Garaže



Hlađenje mašina



Transport materijala



Auto-industrija/topionice



CONTINUO



Otprašivanje



Pakovanje



Grafička industrija



Mašine za rekreaciju



Tekstilna industrija

Kod	Model	Broj obrtaja o/min	Prečnik izduvnog otvora (mm)	Snaga jedinice (kW)	Klasa	Zaštita	Najviša radna temperatura (°C)	Maksimalna jačina struje (A)		Maksimalni protok (m³/h)	Nivo šuma (dB(A))	Težina (kg)	Cena 1G
								230V	400V				
5122007700	CBT-40	2800	40	0,25	B	IP44	120	0,75	0,43	250	78	10	611,00
5122203200	CBT-60-N	2800	60	0,25	F	IP55	120	1,09	0,63	400	73	10,5	473,00
5122202400	CBT-80-N	2800	80	0,45	F	IP55	120	2,1	1,21	730	75	14,5	557,00
5122201600	CBT-100-N	2800	100	0,90	F	IP55	120	2,9	1,70	1250	82	19,5	677,00
5122200800	CBT-130-N	2800	130	1,10	F	IP55	120	4,3	2,50	1910	84	27,5	1.163,00
5122082000	CBT-125	2800	125	2,20	F	IP55	80	8,00	4,60	2000	76	31	1.973,00
5122083800	CBT-160	2800	160	3	F	IP55	80	11'30	6,50	2700	80	44	3.637,00
5122084600	CBT-170	2800	170	4	F	IP55	80	-	7,80	3800	81	55	3.394,00
5122207300	CBB-60-N	2800	60	0,27	F	IP55	120	1,18	-	400	73	10	583,00
5122208100	CBB-80-N	2800	80	0,48	F	IP55	120	2,2	-	730	75	13,5	706,00
5122209900	CBB-100-N	2800	100	0,85	F	IP55	120	3,9	-	1250	79	18,5	672,00
5124005900	CST-60	2750	60	0,18	B	IP44	120	0,67	0,39	310	69	6,5	377,00
5124602300	CSB-60	2750	60	0,20	B	IP44	70	1,2	-	310	69	6,6	395,00

ATEX izdanja

	CBT-100-N EXDIIBT5	2800	100	0,90	F	IP55	120	2,9	1,70	1250	82	19,5	3.103,00
	CBT-100-N EXEIIIT3	2800	100	0,90	F	IP55	120	2,9	1,70	1250	82	19,5	9.787,00
	CBT-125 EEXEIIIT3	2800	125	2,20	F	IP55	80	8,00	4,60	2000	76	31	3.103,00
	CBT-125 EXDIIBT5	2800	125	2,20	F	IP55	80	8,00	4,60	2000	76	31	9.787,00
	CBT-125 EXDIICT4	2800	125	2,20	F	IP55	80	8,00	4,60	2000	76	31	10.277,00
	CBT-125 EXDIP125	2800	125	2,20	F	IP55	80	8,00	4,60	2000	76	31	3.258,00
	CBT-170 EXDIIBHT4	2800	170	4	F	IP55	80	-	7,80	3800	81	55	5.541,00

Pribor za montažu



Zaštitna mreža, montira se na usisu.

Model mreže	Model CBT-N
DEF-100T	40
KRJ-120	60
KRJ-140	80
DEF-140T	100
KRJ-160	130



CBA/CBS Prirubnica za povezivanje

Modelo	Montira se na	Prečnik
CBA-80	Usis CBT-80-N	Ø 125
CBA-100	Usis CBT-100-N	Ø 125
CBA-130	Usis CBT-130-N	Ø 200
CBS-80	Potis CBT-80-N	Ø 125
CBS-100	Potis CBT-100-N	Ø 125
CBS-130	Potis CBT-130-N	Ø 200



CBA-125/CBA-160/CBA-170

Prirubnica za usis za modele CBT-125/CBT-160 /CBT-170



CBS-125/CBS-160/CBS-170

Prirubnica za potis za modele CBT-125/CBT-160 /CBT-170



KBTA

Prigušivač buke na usisu



KBTI

Prigušivač buke na potisu



BF

Fleksi crevo za ekstrakciju isparenja nastala usled zavarivanja.

Fleksi crevo se isporučuje sa usisnom haubom, zidnim nosačem i prirubnicom Ø 160 mm.

Dužina 3-4 metra.

Pogledati cene na strani sa dodatnom opremom.



CBS-100-E5

Prirubnica za direktno spajanje creva BF ili BM sa ventilatorom CBT-100.

Kod	Model	Cena
		1G
	Zaštitna mreža na usisu	
5416528700	DEF-100T	
5416529500	DEF-140T	
5130866600	KRJ-120	21,00
5130867400	KRJ-140	25,00
5130868200	KRJ-160	26,00
	Prirubnica na usisu	
5122600900	CBA-80	99,00
5122601700	CBA-100	150,00
5122602500	CBA-130	202,00
	Prirubnica na usisu za modele CBT-125/160/170	
5130263800	CBA-125	55,00
5130263500	CBA-160	91,00
5130264200	CBA-170	97,00
	Prirubnica na potisu	
5122631400	CBS-80	121,00
5122632200	CBS-100	196,00
5122633000	CBS-130	343,00
	Prirubnica na potisu za modele CBT-125/160/170	
5130263900	CBS-125	107,00
5130263600	CBS-160	125,00
5130264300	CBS-170	144,00

Kod	Model	Cena
		1G
	Prigušivač buke na usisu	
5130301900	KBTA-60	308,00
5130302000	KBTA-80	315,00
5130302100	KBTA-100	352,00
5130302200	KBTA-130	406,00
	Prigušivač buke na potisu	
5130304200	KBTI-60	308,00
5130304300	KBTI-80	315,00
5130304400	KBTI-100	352,00
5130304500	KBTI-130	406,00



BM

Metalno crevo sa spoljašnjim mehanizmom za ekstrakciju isparenja nastala usled zavarivanja.

Crevo se isporučuje sa usisnom haubom, zidnim nosačem i prirubnicom.

Ø 160 mm

Dužina 3-4 metra .

Pogledati cene na strani sa dodatnom opremom.

Kod	Model	Cena
		1G
5122634800	CBS-100-E5	72,00