

## Seriya HX(B/T)R



Zidni aksijalni ventilatori sa "Sickle" ventilacionim kolom, dinamički balansiranim; nizak nivo šuma, zaštićen od korozije primarnom "kataforesis" bojom i završnom poliester bojom (1), monofazni motor sa spoljnim rotorom (HXBR) ili trofazni (HXTR), IP54, klasa F, sa termičkom zaštitom i priključnom kutijom sa ugrađenim kondenzatorom kod monofaznih modela. (1) Modeli 800 do 1000: motor-ventilaciono kolo nisu obojeni.  
**Motori:**  
 Dostupni su modeli sa 2, 4, 6 i 8 polova, u zavisnosti od modela.

### Napajanje:


Monofazno 230V-50Hz  
 Trofazno 400V-50Hz  
 230/400V-50Hz (modeli 250)

Na zahtev, trofazni 230/400V-50Hz. Mogućnost regulacije, osim modela HXBR/4-560, HXBR/4-630, HXTR/4-560, HXTR/4-630 i Ø od 710. Modeli od Ø 800 do 1000 se mogu regulisati frekventnim inverterom (Pogledati tabelu sa karakteristikama).

### Dotadne informacije:

Kretanje vazduha motor-ventilaciono kolo (protok A).  
 Ventilaciono kolo-motor (protok B), po zahtevu.

## PRIMENA

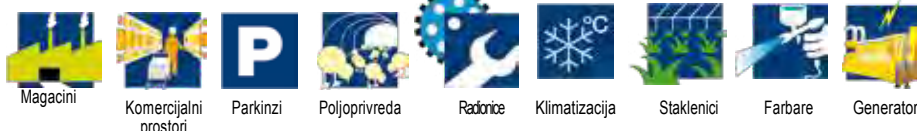

Kod	Model	Broj (o/min)	Napajanje 50Hz	Temperatura		Snaga (W)	Jačina struje (A)		Nivo šuma (dB(A))	Protok m3/h	Težina (kg)	Regulacija brzine (*) (**)	Cena <b>2G</b>
				Min.	Max.		230 V	400 V					
<b>TROFAZNI</b>													
5750254400	HXTR/2-250	2.800	230/400V	-40°C	+60°C	112	0,5	0,3	61	1.530	7,0	Tri 0,37 ili VKFB-45	<b>185,00</b>
5750253600	HXTR/4-250	1.475	230/400V	-40°C	+70°C	47	0,4	0,2	47	770	6,5	RMT-1,5/Tri-0,37/VKFB-45	<b>171,00</b>
5750255100	HXTR/4-315	1.450	400V50Hz	-40°C	+70°C	98	-	0,3	53	2.020	7,0	RMT-1,5/Tri-0,37/VKFB-45	<b>176,00</b>
5750257700	HXTR/4-355	1.410	400V 50Hz	-40°C	+70°C	145	-	0,4	59	2.890	7,5	RMT-1,5/Tri-0,37/VKFB-45	<b>216,00</b>
5740038600	HXTR/4-400	1.380	400V 50Hz	-40°C	+60°C	258	-	0,5	61	4.870	9,0	RMT-1,5/Tri-0,37/VKFB-45	<b>312,00</b>
5740054100	HXTR/6-400	875	400V 50Hz	-40°C	+70°C	123	-	0,5	52	3.610	11,5	RMT-1,5/Tri-0,37/VKFB-45	<b>246,00</b>
5740051700	HXTR/4-450	1.420	400V 50Hz	-40°C	+60°C	450	-	0,9	64	6.910	11,5	RMT-1,5/Tri-0,37/VKFB-45	<b>391,00</b>
5740055800	HXTR/6-450	940	400V 50Hz	-40°C	+60°C	156	-	0,4	53	4.360	11,5	RMT-1,5/Tri-0,37/VKFB-45	<b>394,00</b>
5700384200	HXTR/4-500	1.410	400V 50Hz	-40°C	+70°C	943	-	1,90	67	9.490	16,0	RMT-2,5/Tri-0,55/VKFB-45	<b>428,00</b>
5700385700	HXTR/6-500	915	400V 50Hz	-40°C	+70°C	270	-	0,5	57	5.970	16,0	RMT-1,5/Tri-0,37/VKFB-45	<b>411,00</b>
5700388100	HXTR/4-560	1.410	400V 50Hz	-40°C	+70°C	1.218	-	2,4	69	11.990	21,5	Tri-0,75/VKFB-45	<b>607,00</b>
5700389900	HXTR/6-560	915	400V 50Hz	-40°C	+70°C	482	-	0,90	60	8.890	21,5	RMT-1,5/Tri-0,37/VKFB-45	<b>475,00</b>
5700392300	HXTR/4-630	1.420	400V 50Hz	-40°C	+60°C	1.216	-	2,3	67	13.540	24,0	Tri-0,75/VKFB-45	<b>672,00</b>
5700393100	HXTR/6-630	895	400V 50Hz	-40°C	+60°C	651	-	1,2	61	11.870	24,0	RMT-1,5/Tri-0,37/VKFB-45	<b>490,00</b>
5700395600	HXTR/6-710	930	400V 50Hz	-40°C	+40°C	1.116	-	2,4	62	15.710	27,0	Tri-0,75/VKFB-45	<b>681,00</b>
5720010700	HXTR/6-800	920	400V 50Hz	-40°C	+50°C	1.910	-	3,8	63	24.380	46	Tri-1,5/VKFB-45	<b>1.053,00</b>
5720011500	HXTR/8-800	650	400V 50Hz	-40°C	+70°C	802	-	1,5	55	17.460	45	Tri-0,37/VKFB-45	<b>1.082,00</b>
5720012300	HXTR/12-800	450	400V 50Hz	-40°C	+70°C	309	-	0,7	48	12.050	43	Tri-0,37/VKFB-45	<b>1.126,00</b>
5720057000	HXTR/12-910	440	400V 50Hz	-40°C	+50°C	690	-	2,2	55	20.600		VKFB-45	<b>1.362,00</b>
5720057400	HXTR/12-1000	420	400V 50Hz	-40°C	+50°C	890	-	1,9	56	20.600		VKFB-45	<b>1.445,00</b>
<b>MONOFAZNI</b>													
5750250200	HXBR/2-250	2.800	230V 50Hz	-40°C	+60°C	124	0,5	-	61	1.560	7,0	REB-1/RMB-1,5	<b>195,00</b>
5750251000	HXBR/4-250	1.440	230V 50Hz	-40°C	+60°C	42	0,2	-	47	760	6,5	REB-1/RMB-1,5	<b>181,00</b>
5750252800	HXBR/4-315	1.445	230V 50Hz	-40°C	+40°C	112	0,6	-	53	1.950	7,0	REB-1/RMB-1,5	<b>186,00</b>
5750256900	HXBR/4-355	1.400	230V 50Hz	-40°C	+60°C	145	0,7	-	59	2.870	7,5	REB-1/RMB-1,5	<b>228,00</b>
5740039300	HXBR/4-400	1.395	230V 50Hz	-40°C	+65°C	268	1,2	-	61	5.080	9,0	REB-2,5/RMB-1,5	<b>294,00</b>
5740052500	HXBR/6-400	935	230V 50Hz	-40°C	+50°C	124	0,6	-	49	3.300	9,0	REB-1/RMB-1,5	<b>263,00</b>
5740042600	HXBR/4-450	1.390	230V 50Hz	-40°C	+50°C	473	2,0	-	64	6.280	11,5	REB-2,5/RMB-3,5	<b>361,00</b>
5740053300	HXBR/6-450	925	230V 50Hz	-40°C	+60°C	138	0,6	-	53	4.370	11,5	REB-1/RMB-1,5	<b>414,00</b>
5700381600	HXBR/4-500	1.420	230V 50Hz	-40°C	+70°C	847	3,5	-	67	8.770	16,0	REB-5/RMB-3,5	<b>402,00</b>
5700383200	HXBR/6-500	930	230V 50Hz	-40°C	+70°C	255	1,3	-	57	5.510	16,0	REB-2,5/RMB-3,5	<b>434,00</b>
5700386500	HXBR/4-560	1.390	230V 50Hz	-40°C	+45°C	1.225	5,1	-	69	11.920	21,5	-	<b>516,00</b>
5700387300	HXBR/6-560	915	230V 50Hz	-40°C	+65°C	414	2,0	-	60	8.140	21,5	REB-2,5/RMB-3,5	<b>483,00</b>
5700390700	HXBR/4-630	1.430	230V 50Hz	-40°C	+40°C	1.212	5,3	-	67	14.100	24,0	-	<b>596,00</b>
5700391500	HXBR/6-630	915	230V 50Hz	-40°C	+40°C	587	2,6	-	61	11.380	24,0	REB-5/RMB-3,5	<b>512,00</b>
5700394900	HXBR/6-710	860	230V 50Hz	-40°C	+40°C	900	4,0	-	66	16.668	27,0	-	<b>745,00</b>

\* Regulacija trofaznih modela (RMT) SE PREPORUČUJE NA 400V.

\*\*Za modele sa frekventnimkonvertorom VKFB motor treba da bude E22.

### Dotadna oprema:

Model	Zaštitna mreža	Nadpritisna žaluzina	
		Plastična	Aluminijumska
250	DEF-250 D	PER-250 W	PER-250 CN
315	DEF-325 D	PER-355 W	PER-355 CN
355	DEF-375 D	PER-355 W	PER-355 CN
400	DEF-450 D	PER-400 W	PER-400 CN
450	DEF-450 D	PER-450 W	PER-450 CN
500	DEF-525 D	PER-500 W	PER-500 CN
560	DEF-630 D	PER-560 W	PER-630 CN
630	DEF-630 D	PER-630 W	PER-630 CN
710	DEF-800 D	PER-710 W	PER-710 CN
800	DEF-800 D	PER-800 W	PER-800 CN
1000	DEF-1000 D	PER-1000 W	PER-1000 CN