


Centrifugalni ventilatori u kućištu Serija KAB(B/T)



Ventilator u kućištu proizveden od pocinkovanog lima bočnih panela sa duplim zidom interno poredjanih sa 25 mm debljine vatrostalne, fiberglas zvučne izolacije (M0). Na izlazu montirana prirubnica za kružne kanale. KAB(B) / KAB(T) poseduje ventilaciono kolo sa unazad povijenim lopaticama i motorom postavljenim izvan strujanja vazduha. Isporučuje se sa pocinkovanom posudom za prikupljanje kondenza.

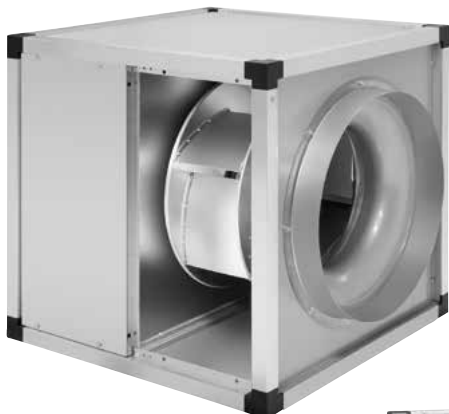

Motors

- KAB(B): Monofazni 4 pola motor 230V-50Hz, IP55, class F, sa termičkom zaštitom, kontrola brzina putem napona.

Maksimalna temperatura u prostoru motora:

KAB(B)/4-3000/315: 70°C

KAB(B)/4-4000/355: 50°C

KAB(B)/4-6000/400: 40°C

- Od KAB(T)/4-3000/315 do

KAB(T)/4-9000/500: Trofazni 4 pola motor 230/400V-50Hz, IP55, Class F, sa termičkom zaštitom, brzina kontrolisana pomoću invertera.

- KAB(T)/4-12000/560: Trofazni 4 pola motor 400V-50Hz, IP55, Class F, sa termičkom zaštitom, brzina kontrolisana pomoću invertera.

Dodatne informacije:

Radna temperatura -20°C do 100°C.

Upotreba



Kontinualan rad



Industrijske i komercijalne kuhinje

Kod	Model	Broj (o/min)	Snaga (W)	Jačina struje (A)		Protok (m³/h)	Nivo šuma (dB(A) na 1,5 m)			Težina (kg)	Cena 2G
				230V	400V		Usis	Emitovano	Potis		
MONOFAZNI											
5148518300	KABB/4-3000/315	1.370	305	1,60	-	2.470	59,0	53,0	60,0	33	913,00
5148518400	KABB/4-4000/355	1.385	487	2,00	-	3.790	62,0	54,0	64,0	40	1.027,00
5148518500	KABB/4-6000/450	1.400	932	3,90	-	5.780	65,0	53,0	70,0	58	1.200,00
TROFAZNI											
5148518700	KABT/4-3000/315	1.430	327	1,20	0,70	2.750	60,0	54,0	61,0	33	867,00
5148518800	KABT/4-4000/355	1.450	561	2,10	1,20	4.000	63,0	55,0	65,0	40	976,00
5148518900	KABT/4-6000/450	1.495	1.094	4,20	2,40	6.120	67,0	55,0	71,0	58	1.140,00
5148519000	KABT/4-9000/500	1.430	2.022	6,10	3,50	8.840	76,0	62,0	77,0	75	1.250,00
5148518600	KABT/4-12000/560	1.460	2.673	-	5,00	11.400	71,0	59,0	75,0	120	1.326,00