

SLOT REŠETKE

SLOT DIFFUSERS

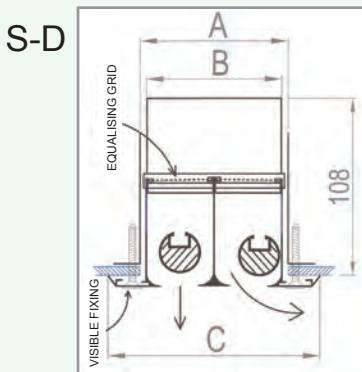



TABELA DIMENZIJA/
DIMENSION TABLE

PROREZA /SLOTS	A	B	C
1	50	44	87
2	90	83	126
3	130	123	160
4	167	160	204
5	205	198	241

S

- Linijska slot rešetka za ubacivanje ili izbacivanje vazduha koja se može montirati na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela na svakom prorezu.

Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by a adjustable cylindrical blade per slot.

S-D

- Linijska slot rešetka za ubacivanje ili izbacivanje vazduha koja se može montirati na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela na svakom prorezu. Ima damper sa suprotnosmernim lamelama za regulaciju protoka.

Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by a adjustable cylindrical blade per slot. With opossed blade damper for regulation of air flow.

S-SX

- Linijska slot rešetka za ubacivanje ili izbacivanje vazduha koja se može montirati na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela na svakom prorezu. Sa izbušenim jednakim otvorima.

Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by a adjustable cylindrical blade per slot. With perforatedequalising.

S-D-SX

- Linijska slot rešetka za ubacivanje ili izbacivanje vazduha koja se može montirati na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela na svakom prorezu. Ima damper sa suprotnosmernim lamelama za regulaciju protoka. Sa izbušenim jednakim prorezima.

Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by a adjustable cylindrical blade per slot. With opossed blade damper regulation of air flow and perforated equalising grid.

S-AUTH-O/A


- Linijska plafonska slot rešetka sa 2 do 6 prozeza za ubacivanje vazduha. Podešavanje za grejanje (vertikalno) ili hladjenje (horizontalno, u jednom (S-AUTH-O) ili dva (S-AUTH-A) smera) se postiže automatski, zavisno od temperature vazduha, sa termoregulatorom koji pokreće unutrašnji cilindar. Bez potrebe za električnim napajanjem.

Linear ceiling slot diffuser with 2 up to 6 slots for supply air. The adjustment in heating (vertical) or cooling mode (horizontal, in one (S-AUTH-O) or two (S-AUTH-A) directions) is succeeded automatically, according to the supply air temperature, with a thermal actuator which moves the internal cylinder. There is no need of electric power.

DODATAK U CENI / WITH EXTRA CHARGE



- Ugao za slot difuzor, S90°(1,2,3 ili 4): 32,77 €/kom, RAL 40,44€/kom
- Additional charge for slot corner S 90° (1,2,3 or 4 slots): 32,77 €/pcs, RAL 40,44€/kom



- Dodatak za skriveno montiranje sa „Π“ okvirom (do 6 slotova): 5€/kom za delove dužine do 2,00m i 6€/kom za delove dužine od 2,01 do 2,50m.
- Additional charge for secret fixing with "Π" frame (up to 6 slots): 5€/pcs for pieces with length up to 2,00m and 6€/pcs for pieces with length from 2,01 to 2,50m.



-Cena dodatka (po komadu), za automatsko podešavanje difuzora.

- Additional charge per piece of slot type diffuser for automatic adjustment (max. piece length 1,5m).

No OF SLOTS: Br. proreza / No of slots

	1	2	3	4	5	6
S-AUTH-O	45,06	49,16	53,25	57,35	61,45	65,54
S-AUTH-A		53,25	57,35	61,45	65,54	69,64

NAPOMENE:

*Za neke specijalne RAL boje postoji dodatak u ceni.
Kontaktirajte nas za detaljnije informacije.

NOTES:

*For some special RAL colours there is extra charge.
Come in touch with us for more information.

€/m

Br. proreza / No of Slots	S	S-D	S-SX	S-D-SX
1	25,40	-	27,67	-
2	36,82	52,68	40,50	56,36
3	50,98	69,53	56,09	74,63
4	65,15	84,69	71,67	91,21
5	79,31	103,24	87,24	111,17
6	93,48	121,38	102,83	130,73
7	107,64	139,37	119,60	151,33
8	121,79	158,76	133,97	170,94
9	135,97	177,46	149,57	191,06
10	150,13	196,58	165,14	211,60

€/m

Br. proreza / No of Slots	S	S-D	S-SX	S-D-SX
1	33,07	-	35,34	-
2	44,49	60,35	48,17	64,03
3	58,65	77,20	63,75	82,30
4	72,82	92,36	79,34	98,88
5	86,86	110,79	94,79	118,72
6	102,38	130,28	111,73	139,63
7	117,89	149,62	129,85	161,58
8	133,39	170,36	145,57	182,54
9	148,92	190,41	162,52	204,01
10	164,42	210,88	179,44	225,89

CENOVNIK ZA REŠETKE OD
ELOKSIRANOG ALUMINIJUMA
U PRIRODNOJ BOJI

PRICELIST FOR GRILLES MADE
OF **ANODIZED ALUMINIUM**
IN NATURAL COLOUR

CENOVNIK ZA REŠETKE
OBOJENE RAL BOJOM
PLASTIFICIRANE

PRICE LIST FOR GRILLES
PAINTED IN RAL COLOUR
ELECTROSTATICALLY



S-ON OFF-220V-O/A & S-ANALOGUE 24V-O/A

- ◆ Aluminijumska linjinska plafonska slot rešetka za ubacivanje vazduha. U svakom prorezu se nalazi valjčić za podešavanje mlaza, koji se podešavaju pomoću ON-OFF 220V ili analognog 24V motorića.
NAPOMENE:
 - Rešetka može da ima od 2 do 6 proreza.
 - Jeden motorić pomera valjčice u jednodejnoj S slot rešetki, dužine ne veće od 2,5m.
Kada je rešetka duža, rešetka se pravi iz više delova i tada je potrebno i više motorića.
 - Kod višedelnih S slot rešetki dužine do 1,5m, motorić se postavlja na poslednji deo.
Za dužine veće 1,5-2,5m motorić se postavlja u sredini.
 - Valjčici mogu da se pomjeraju svi u istom pravcu (-O) ili deo u jednom, a deo u suprotnom pravcu (-A).
 - Slot rešetke su dostupne i farbane u RAL bojama.
- ◆ Aluminium linear multiple slot diffuser. For supply air and ceiling installation. In each slot there is a cylindrical blade for air pattern adjustment. With electric adjustment of the cylindrical blades with ON-OFF 220V or ANALOGUE 24V actuator.
NOTES:
 - Manufactured from 2 to 6 slots.
 - One electric actuator moves the blades in one piece of S slot diffuser with maximum length of 2,5m.
In case of bigger lengths more pieces of S and electric actuators are required.
 - For S pieces with length up to 1,5m the electric actuator is installed at the end of the piece.
For length 1,5-2,5m in the middle
 - The blades can move all in one direction (-O) or some in one direction and the other in the opposite direction (-A).
 - Available in anodized or RAL painted slot diffuses.

DOPLATA ZA MOTORIĆE ZA S SLOTOVE ADDITIONAL COST IN EACH PIECE OF S SLOT DIFFUSER

S-ON/OFF-220V	Broj proreza / Number of slots				
	2	3	4	5	6
S-ON/OFF 220V-O	118,06	122,15	126,25	130,35	134,44
S-ON/OFF 220V-A	122,15	126,25	130,35	134,44	138,54

S-ANALOGUE-24V	Broj proreza / Number of slots				
	2	3	4	5	6
S-ANALOGUE 24V-O	162,71	166,81	170,90	175,00	179,09
S-ANALOGUE 24V-A	166,81	170,90	175,00	179,09	183,19

EXAMPLE OF PRICE CALCULATION

pr: Cena za S4-RAL-ANALOGUE 24V-A dužine L=4m iznosi:
Slot rešetka će da se izradi z1 2 dela.
Slot rešetka košta 88,88 €/m X 4m= 355,52 €
Motor košta: 2X213,60 € = 427,20 €
Ukupna cena iznosi 355,52 + 427,20=782,72 €

EXAMPLE OF PRICE CALCULATION

i.e.: The catalogue price for S4-RAL-ANALOGUE 24V-A with length L=4m is:
This slot diffuser will be manufactured in 2 pieces.
Slot diffuser cost 72,82 €/m X 4m= 291,28 €
Electric actuator cost: 2X175,00 € = 350,00 €
So the catalogue price is 291,28 + 350,00=641,28 €

NAPOMENE:

*Za neke specijalne RAL boje postoji dodatak u ceni.
Kontaktirajte nas za detaljnije informacije.

NOTES:

*For some special RAL colours there is extra charge.
Come in touch with us for more information.

SLOT REŠETKE

SLOT DIFFUSERS



SL-N

SL(-SX)

- ◆ Linijska slot rešetka za ubacivanje ili izvlačenje vazduha koja može da se ugradi na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela koje mogu da se podešavaju sa obe strane slota. Skrivena ugradnja sa "Π" ramom bez doplate. -SX: Sa perforiranom mrežicom.
- ◆ *Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by adjustable blades in every side of the slots. Secret fixing with "Π" frame without extra charge. -SX: With perforated equalising grid.*

SL-C(-SX)

- ◆ Linijska slot rešetka za ubacivanje ili izvlačenje vazduha koja može da se ugradi na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela koje mogu da se podešavaju sa obe strane slota. Sa uzanim dodatnim ramom. Skrivena ugradnja sa "Π" ramom bez doplate. -SX: Sa perforiranom mrežicom.
- ◆ *Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by adjustable blades in every side of the slots. With narrow external frame. Secret fixing with "Π" frame without extra charge. -SX: With perforated equalising grid.*

SL-C-P(-SX)

- ◆ Linijska slot rešetka za ubacivanje ili izvlačenje vazduha koja može da se ugradi na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela koje mogu da se podešavaju sa obe strane slota. Sa uzanim dodatnim ramom. Skrivena ugradnja sa "T" ramom u spuštenom plafonu debljine 12mm. -SX: Sa perforiranom mrežicom.
- ◆ *Linear slot diffuser, for supply or exhaust air and installation in ceilings. The direction of the air throw is controlled by adjustable blades in every side of the slots. With narrow external frame. With "T" shape profile for secret fixing in false ceiling 12mm thick. -SX: With perforated equalising grid.*

SL-N(-SX)

- ◆ Linijska slot rešetka za ubacivanje ili izvlačenje vazduha koja može da se ugradi na plafon ili zid. Pravac strujanja vazduha je kontrolisan preko pokretnih lamela koje mogu da se podešavaju sa obe strane slota. Bez dodatnog rama. Skrivena ugradnja sa "T" ramom u spuštenom plafonu debljine 12mm. -SX: Sa perforiranom mrežicom.
- ◆ *Linear slot diffuser, for supply or exhaust air and installation in ceilings or walls. The direction of the air throw is controlled by adjustable blades in every side of the slots. Without external frame. For secret fixing in false ceiling 12mm thick cutted in 45° angle. -SX: With perforated equalising grid.*

€/m

Br. proreza / No of Slots			
	SL, SL-C	SL-SX, SL-C-SX, SL-C-P, SL-N	SL-C-P-SX, SL-N-SX
1	25,40	27,94	30,48
2	36,82	40,50	44,18
3	50,98	56,08	61,18
4	65,15	71,66	78,18
5	79,31	87,24	95,17
6	93,48	102,83	112,18
7	107,64	118,40	129,17
8	121,79	133,98	146,15
9	135,97	149,57	163,16
10	150,12	165,13	180,15

CENOVNIK ZA REŠETKE OD
ELOKSIRANOG ALUMINIJUMA
U PRIRODNOJ BOJI

PRICELIST FOR GRILLES MADE
OF ANODIZED ALUMINIUM
IN NATURAL COLOUR

- Doplata za slot uglove SL 90° (1,2,3 i 4 slota): Eloksiran 32,77€/kom, RAL 40,44€/kom.
- Additional charge for slot corner SL 90° (1,2,3 or 4 slots): Anodized 32,77€/pcs, RAL 40,44€/pcs.

Br. proreza / No of Slots			
	SL, SL-C	SL-SX, SL-C-SX, SL-C-P, SL-N	SL-C-P-SX, SL-N-SX
1	33,07	35,61	27,94
2	44,49	48,17	40,50
3	58,65	63,75	56,08
4	72,82	79,33	71,66
5	86,97	94,91	87,24
6	102,38	111,73	102,83
7	117,89	128,66	118,40
8	133,40	145,58	133,98
9	148,93	162,52	149,57
10	164,43	179,45	165,13

Br. proreza / No of Slots

CENOVNIK ZA REŠETKE
OBOJENE RAL BOJOM
PLASTIFIRANE

PRICE LIST FOR GRILLES
PAINTED IN RAL COLOUR
ELECTROSTATICALLY

NAPOMENE:

*Za neke specijalne RAL boje postoji dodatak u ceni.

Kontaktirajte nas za detaljnije informacije.

*Skica difuzora se nalazi na strani P3.

NOTES:

*For some special RAL colours there is extra charge.

Come in touch with us for more information.

*Drawing of the diffuser with dimensions in the page P3.